


### Dual Voltage to Current Driver Module (24 Vac/dc)

**2VID/24VAC**  
Dual Voltage to Current Driver Module (24 Vac/dc)

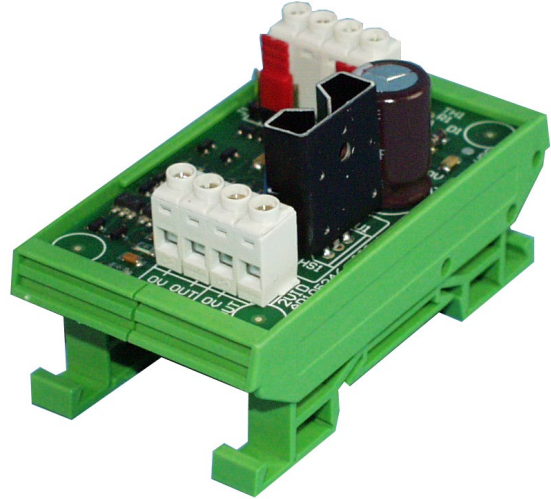


#### Description

The Voltage to Current Driver is a two channel output interface which converts two 0 to 10V signals into two 0 to 20 mA outputs. It can act as an interface between an IQ controller and any device requiring 0 to 20 mA inputs. There are manual override links for each output which can select AUTO, ON (20 mA), or OFF (0 mA), and can be used to aid commissioning. Field wiring is facilitated by rising cage clamp type terminals.

#### Features

- Dual channel 0 to 10V/0 to 20 mA converter.
- AUTO/ON/OFF manual override links.
- 4 to 20 mA can be achieved by controller strategy.
- Standard DIN rail mounting.
- Rising cage clamp terminals.
- 24 Vac/dc supply.

#### Physical

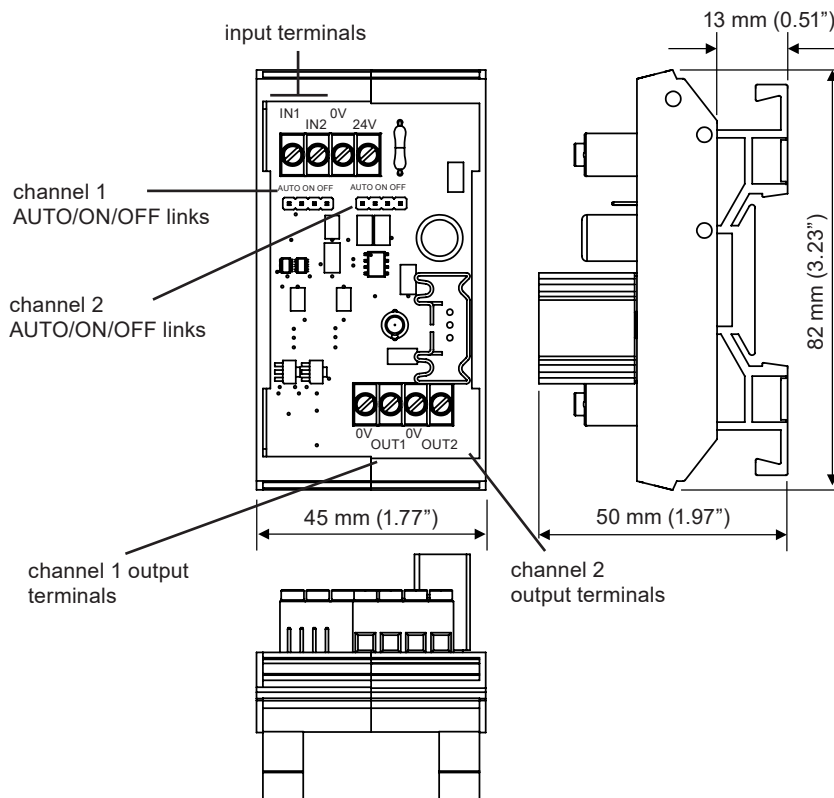

## FUNCTIONALITY

The 2VID converts two 0 to 10 V voltage channels into two 0 to 20 mA current channels.

**Mounting:** The 2VID is designed to be mounted on a standard DIN rail.

**Power connection:** The interface's power connection is made to a 24 Vdc (e.g. IQ's auxiliary supply) or 24 Vac supply (isolated or earthed to IQ earth) using the 0 V and 24 V connections.

**AUTO/ON/OFF:** For commissioning purposes each channel may be switched ON (20 mA), OFF (0 mA), or back to Auto (controlled by its input) using its AUTO/ON/OFF link. The ON/OFF override positions only work if the appropriate input is disconnected. Each AUTO/ON/OFF link can be replaced by a SPDT switch.

**Connections:** 1 part screw terminals for 0.5 to 2.5 mm<sup>2</sup> cross section area (20 to 14 AWG) cable are used for inputs, outputs, and power connection. All terminals are rising cage clamp type. Each AUTO/ON/OFF link may be replaced by a 4 in line connector for connection of a switch.

## INSTALLATION

The 2VID should be mounted in a protective case close to the IQ controller. The procedure involves:

- Mount the 2VID in position
- Set AUTO/ON/OFF links
- Set IQ analogue output channel for voltage
- Wire the 2VID to the controller
- Wire the 2VID to the HVAC equipment
- Connect the 24 V supply
- Check interface operation


The installation procedure is covered in the 2VID (24 Vac/dc) Installation Instructions (TG200484).

## DISPOSAL

COSHH (Control of Substances Hazardous to Health - UK Government Regulations 2002) ASSESSMENT FOR DISPOSAL OF the 2VID. No parts affected.

### RECYCLING

All plastic and metal parts are recyclable. The printed circuit board may be sent to any PCB recovery contractor to recover some of the components for any metals such as gold and silver.

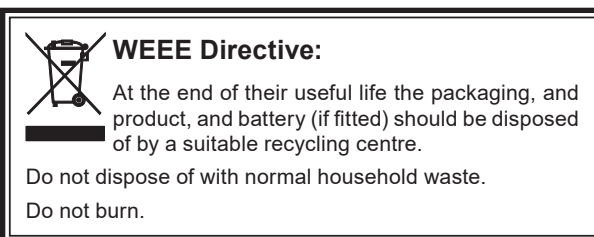

## ORDER CODES

2VID/24VAC

1 off 2VID module for DIN rail mounting

## SPECIFICATIONS

### ELECTRICAL

Supply Voltage	:24 Vdc or Vac $\pm$ 20 %.
Supply current	
24 Vac	:135 mA
24 Vdc	:55 mA
Input signal	:0 to 10 Vdc (<1 mA per channel).
Output signal	:0 to 20 mA.
Input/Output	
Conversion	: $\pm$ 5 % accuracy.
Output load	:0 to 600 $\Omega$
Manual override	:linkable AUTO/ON/OFF.

### MECHANICAL

Dimensions	:82 mm (3.23") x 45 mm (1.77") x 50 mm (1.97").
Connectors	:Single part with rising cage clamp terminals for 0.5 to 2.5 mm <sup>2</sup> cross section area (20 to 14 AWG) cable.
DIN rail	:Top hat profile (DIN 46277-3, EN50022, BS5584:1978)

### ENVIRONMENTAL

Safety	:EN61010.
Ambient limits	
storage	:-10 °C (14 °F) to +70 °C (158 °F)
operating	:-10 °C (14 °F) to +50 °C (122 °F)

Please send any comments about this or any other Trend technical publication to [techpubs@trendcontrols.com](mailto:techpubs@trendcontrols.com)

© 2021 Honeywell Products and Solutions SARL, Connected Building Division. All rights reserved. Manufactured for and on behalf of the Connected Building Division of Honeywell Products and Solutions SARL, Z.A. La Pièce, 16, 1180 Rolle, Switzerland by its Authorized Representative, Trend Control Systems Limited.

Trend Control Systems Limited reserves the right to revise this publication from time to time and make changes to the content hereof without obligation to notify any person of such revisions or changes.

### Trend Control Systems Limited

St. Mark's Court, North Street, Horsham, West Sussex, RH12 1BW, UK. Tel: +44 (0)1403 211888, [www.trendcontrols.com](http://www.trendcontrols.com)



TR CU Certification